



RELIEF JOINT DETAIL FOR PAVEMENT SECTIONS WITH C/L RADII TO 500' AND DELTAS (Δ) GREATER THAN 50°

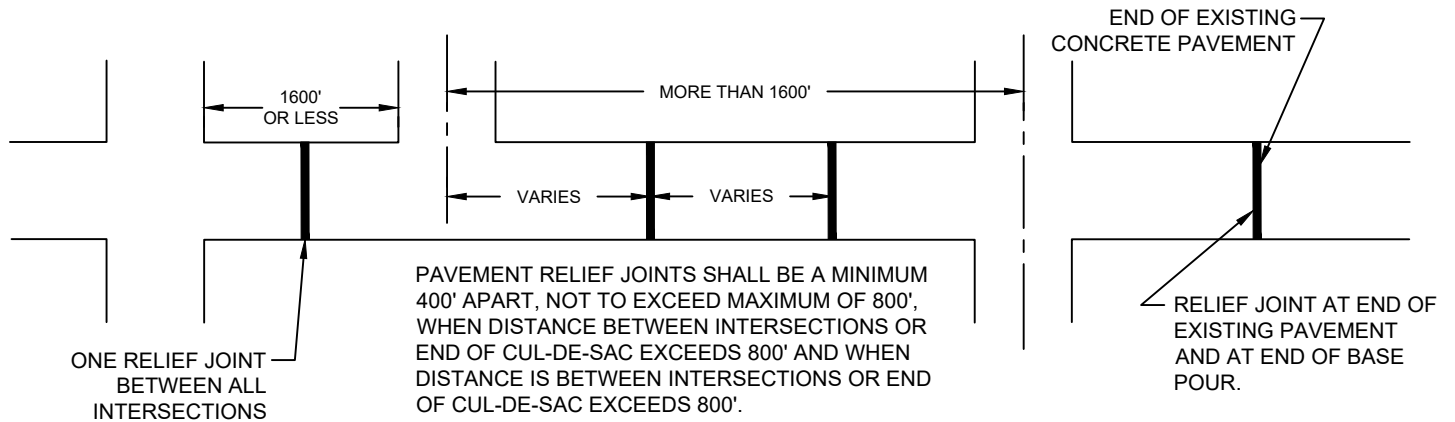

TYPICAL LOCATION PLAN

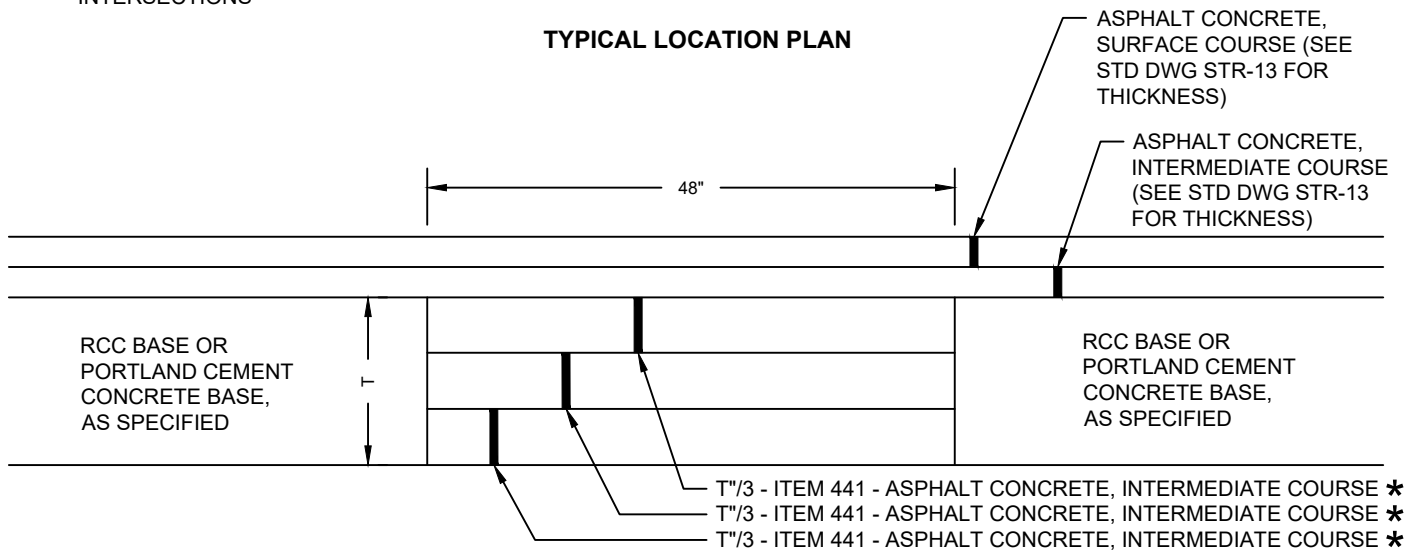


SECTION A-A FOR CONCRETE BASE PAVEMENT

NOTES:

- 2" EXPANSION MATERIAL SHALL BE PLACED AT ALL PAVEMENT RELIEF JOINTS IN THE STRAIGHT CURB, OR CURB AND GUTTER AND CENTERED ON THE PAVEMENT RELIEF JOINT.
- ALL RESIDENTIAL RELIEF JOINTS SHOULD BE LOCATED OR RELOCATED AWAY FROM DRIVEWAYS, IF POSSIBLE.

* USE ITEM 441 - ASPHALT CONCRETE, SURFACE COURSE IF LAYER IS TO BE A SURFACE COURSE USE TYPE 2 FOR THE INTERMEDIATE COURSE ASPHALT. NOT TO SCALE

Date: 1/1/20	Standard Construction Drawing	
	<p>RIGID PAVEMENT RELIEF JOINT</p>	<p>Drawing No. STR-14</p>